

INSTALLATION INSTRUCTIONS

USB Charger & Tamper Resistant Receptacle

THANK YOU for purchasing this product.
Read all instructions carefully.

FEATURES

- **2 Type A USB CHARGING PORTS** Capable of delivering up to 3.6 amps
- **CHARGE MULTIPLE DEVICES:** Tablets, Smart Phones, Apple® iPod, Apple® iPhone and more
- **AUTO SHUT DOWN** if combined devices exceed power capacity
- **REPLACES RECEPTACLES** Standard and Decorative
- **BACK & SIDE WIRE** for easy installation

SPECIFICATIONS

- Meets UL 498 and UL 1310 Standards
- MEETS CSA C22.2 NO. 42
- MEETS NEC AND CEC REQUIREMENTS
- **RECEPTACLE RATING** 15 Amp or 20 Amp | 125 Volts AC | 60 Hz | 5 Volts DC
- **USB RATING** 3.6 Amps
- **WIRE TERMINALS** #12 to 14 AWG Gauge
- **OPERATING TEMPERATURE** -4° to 104°F (-20° to 40°C)
- **NEMA 5-15R, 5-20R**
- **FCC PART 15: CLASS B FOR RESIDENTIAL**

FCC COMPLIANCE STATEMENT

These two conditions apply to the operation of this device:

1. This device may not cause harmful interference
2. This device must accept any interference received, including interference that may cause undesired operation of the device

INSTALLATION



WARNING: TO AVOID FIRE, SHOCK, OR DEATH, TURN OFF POWER AT CIRCUIT BREAKER OR FUSE. TEST THE POWER TO BE SURE IT IS OFF BEFORE WIRING!

Use this product in accordance with appropriate electrical codes and regulations.

1. Install device in standard electrical box measuring at least 3" x 2" x 2½" (76 x 51 x 63.5mm)
2. Wire device in accordance with NEC requirements
3. Connect wires following Wiring Diagram shown in Diagram A
4. Mount device in electrical box using screws provided
5. Install wall plate

NOTE: Back wire and side wire terminals accept #12 to #14 gauge copper or copper clad wire


SIDE WIRE: Loop wire around terminal screws and firmly tighten terminal screw

BACK WIRE: Insert wires through terminal holes in back of device. Tighten terminal screws firmly

6. Once installation is complete, restore power at circuit breaker or fuse.

If you are not sure about any part of these instructions, consult a certified electrician

WIRING DIAGRAM - Diagram A

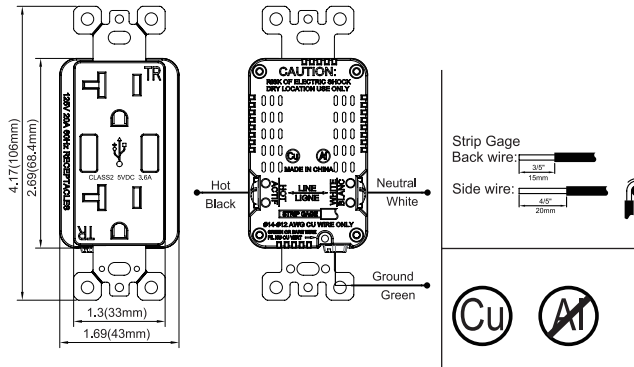

20 Amp Device Shown Here

NOTES

- Use this product with Class 2 connectors and interconnecting cables
- Class 2 USB ports are not intended for use with appliances and supporting products
- All connected Class 2 output cables must be routed away from the receptacle slots or any plug inserted into the receptacle
- Use this device with copper or copper-clad wire only

TWO YEAR LIMITED WARRANTY

USI Electric, Inc. /Universal Security Instruments, Inc. ("USI") warrants this product to be free from defects in material and workmanship for a period of two years from the date of purchase. This warranty shall not apply to any damage which may be caused by this product. This warranty applies only to the original consumer purchaser and only to this product used in normal residential use and service. If this product is found to be defective, USI's only obligation, and your exclusive remedy, is the repair or replacement of the product, at USI's discretion, provided the product has not been damaged through misuse, abuse, accident, modifications, alteration, neglect or mishandling. This warranty does not cover liability or reimbursement for labor for removal or reinstallation. This Warranty shall not apply to any product which is found to have been improperly installed, set-up, or used in any way not in accordance with the instructions supplied with the product.

PRODUCT RETURNS

For replacement of this product under the terms of this Warranty, contact the Customer Service Department at 800-390-4321 extension 238 to obtain the current postage and handling fees. **USI does not warrant, and specifically disclaims any warranty, whether express or implied, of fitness for a particular purpose, other than the warranty contained herein. No implied warranty on this product, created by state law, shall extend beyond the term of this warranty unless such law otherwise provides. USI specifically disclaims any liability and shall not be liable for any consequential or incidental loss or damage, including, but not limited to, damages to any equipment with which this product is used.** Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitations or exclusions may not apply to you. No agent, representative, dealer, or employee of the company has the authority to increase or alter the obligations or terms of this Warranty. This Warranty gives you specific legal rights and you may also have other rights which vary from state to state. This Warranty is only valid for merchandise purchased from outlets in the United States and Canada.

