



Model MP116S

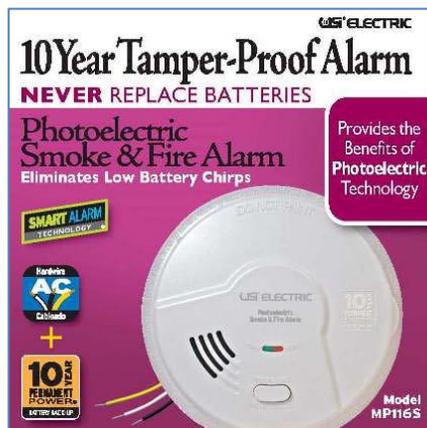

PRODUCT DESCRIPTION

10 Year Tamper Proof Permanent Power Sealed Battery Photoelectric Smoke & Fire Smart Alarm
120V AC/DC Hardwired Alarm with 10 Year Permanent Power Sealed Battery Backup

FEATURES & BENEFITS

- Hardwired Alarm with 10 Year Permanent Power Sealed Battery Backup
- Interconnectable with up to 24 compatible USI Electric alarms and devices
- 10 year sealed backup batteries provide continuous protection—even in the event of a power outage
- Patented Quick Find® alarm origination—easily locate first alarm to sound in an interconnected system
- Lithium-Free Permanent Power from Duracell® Duralock Power Preserve™ Technology
- ECO Friendly—Reduces environmental waste & eliminates disposal of up to **twenty** 9 volt batteries
- Maintenance Free Battery Power—No batteries to replace for the life of the alarm
- Tamper proof design provides a higher level of security and prevents battery removal
- Gives a decade of peace of mind
- Saves money—Never replace batteries for 10 years, saving up to \$38.00 over the life of the alarm
- Eliminates annoying low battery chirps
- 10 year sealed batteries provide continuous protection—even in the event of a power outage
- Photoelectric Technology is typically more effective at detecting slow smoldering fires
- Drift compensation feature allows alarm to auto adjust sensitivity if the photoelectric chamber becomes dusty or dirty over time—further reducing nuisance alarms
- Smart Alarm Technology virtually eliminates nuisance alarms. Ideal for installation in EVERY room
- Deactivation key switches alarm off and makes alarm ready for disposal
- Lock-out feature prevents deactivated alarm from being reinstalled
- Choose this alarm if you are looking for an alarm with superior nuisance alarm resistance
- 10 year product end-of-service life warning sounds when it is time to replace alarm
- This alarm is suitable for installation in houses, apartments, dormitory and manufactured housing
- Meet New Laws & Legislation-This alarm exceeds industry standards, and ETL listed to UL Standard UL 217 and California State Fire Marshal approved
- Fast & easy to install. Perfect for new or replacement installations
- Automatic temperature and humidity compensation continuously adjusts to variations in environmental conditions , reducing nuisance alarms
- For added security, tamper-resistant locking feature prevents unwanted alarm removal
- The larger mounting base covers drywall imperfections and old paint marks
- The single silence/test button temporarily quiets nonemergency alarms and tests alarm functionality
- Temperature Range is 40°F to 100°F (0°C to 38°C). Humidity Range is 5% to 85% relative humidity (RH)
- 10 year limited warranty on both battery and alarm

CORPORATE OFFICES

11407-A Cronhill Drive | Owings Mills, MD 21117-6218 USA
phone 410.363.3000 | fax 410.363.2218
www.UniversalSecurity.com